

Watch Movement Specification and Drawing

Standard Mechanical Movement

NH37A



Movement Size: **12"**

Diameter: **Φ27.40mm** (Φ29.36mm with Dial Holding Spacer)

Height: **5.32mm**

Items	Ver.	Items	Ver.
Specification	1		
Appearance - 1	1		
Appearance - 2	1		
Casing	1		
Hand Fitting	1		
Hand Setting Stem	1		
Dial	1		
Assembly Plan	1		
Hands	1		

CAL.NH37A 12 Ligne Mechanical Movement

Three Hands with 1 Eye & Date

Small 24 Hour Indicator Hand



1. FUNCTION

- Jewel 24 jewels
- Accuracy -20 ~ +40 seconds / day ($23 \pm 2^{\circ}\text{C}$)
- Regulation hands unbalance
 - Hour hand : Less than $1.50\ \mu\text{N}\cdot\text{m}$ (150 mg·mm)
 - Minute hand : Less than $1.25\ \mu\text{N}\cdot\text{m}$ (125 mg·mm)
 - Second hand : Less than $0.60\ \mu\text{N}\cdot\text{m}$ (60 mg·mm)
 - Small 24 hour indicator hand : Less than $0.05\ \mu\text{N}\cdot\text{m}$ (5 mg·mm)
- Additional function
 - Manual winding
 - Automatic winding with ball bearing
 - Both winding with one way clutch
 - Second hand stop mechanism
 - Date display with quick date correction
 - 24 hour indicator (Synchronized regular hour hand)

2. USE AND TEST CONDITION



- Vibration frequency 21,600 vibrations per hour
- Duration time More than 41 hours
- Antimagnetic $\geq 4800\ \text{A / m}$ (Direct current magnetic field)
- Test of accuracy 20 seconds (Duration of measurement)
- Casing
 - *1. Screw type case back is required
 - *2. Non-corresponding with Diver's watch


*** All specifications are subject to change without notice.**

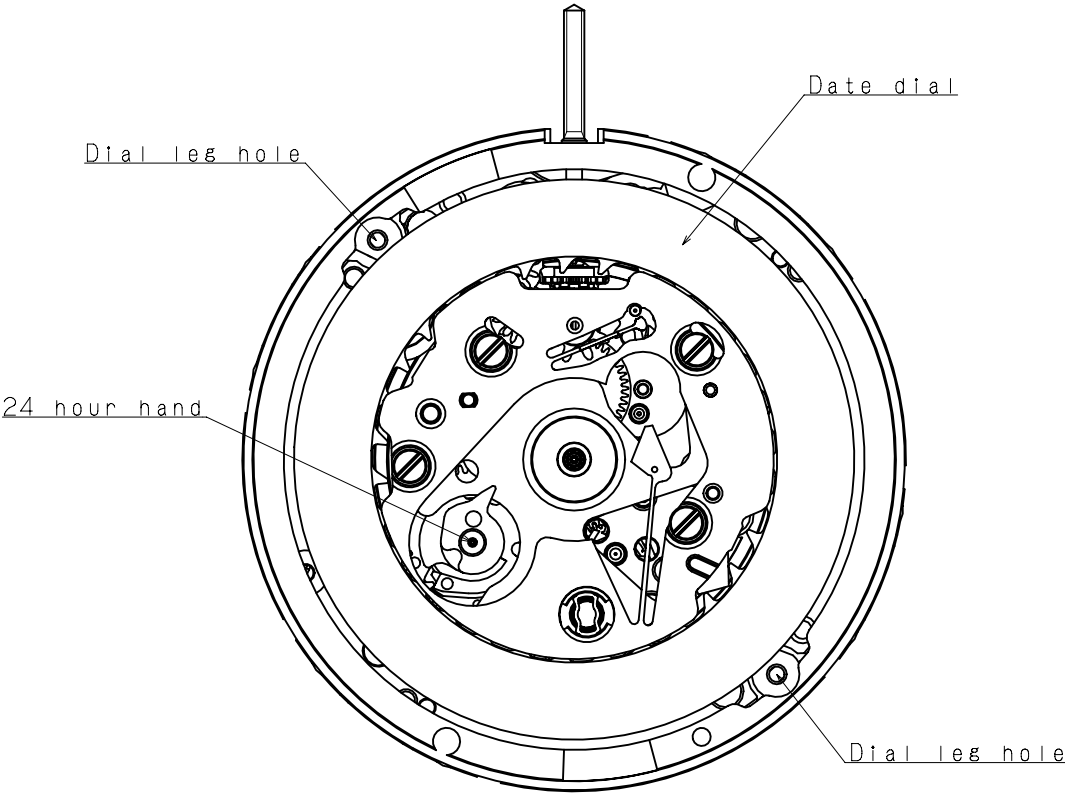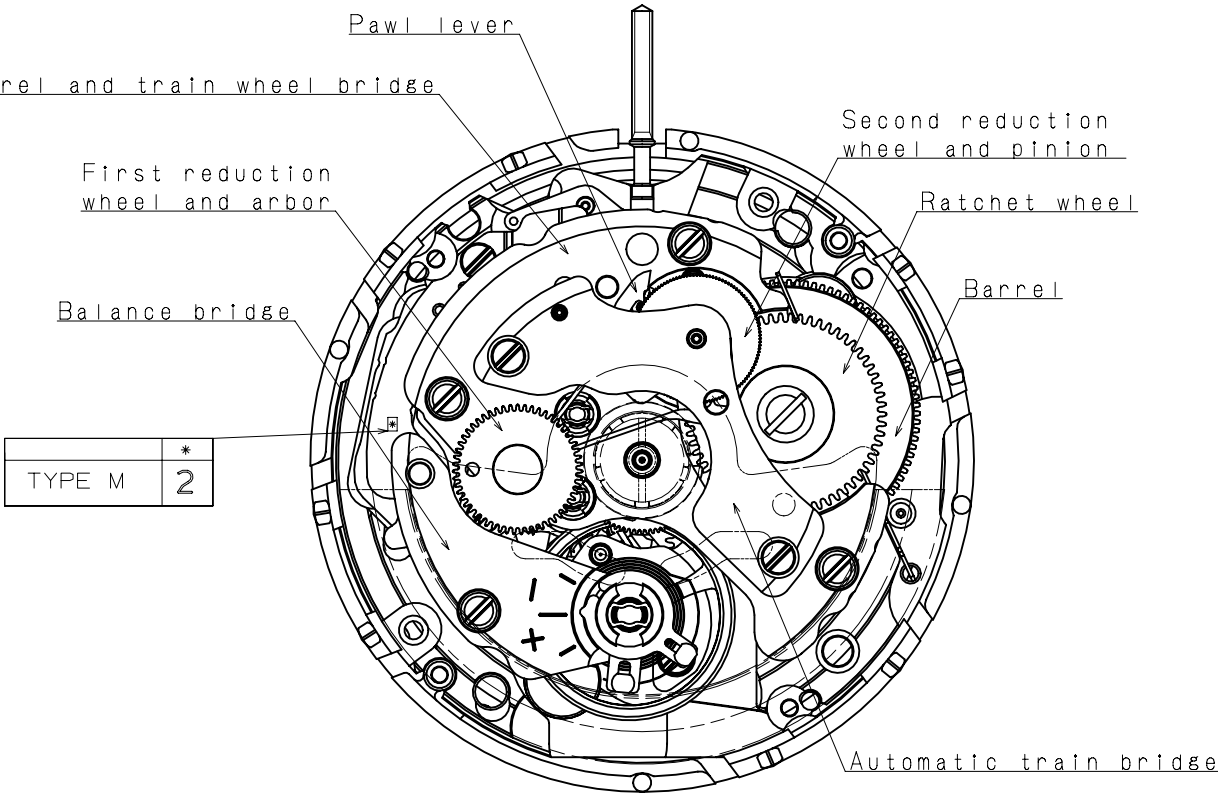


Oscillating weight

Marking	Country of origin
JAPAN	JAPAN
MALAYSIA	MALAYSIA

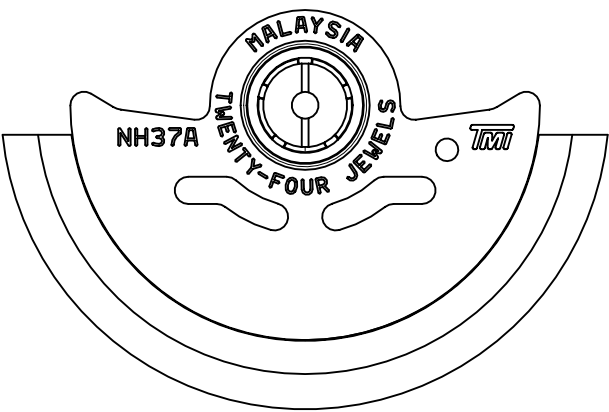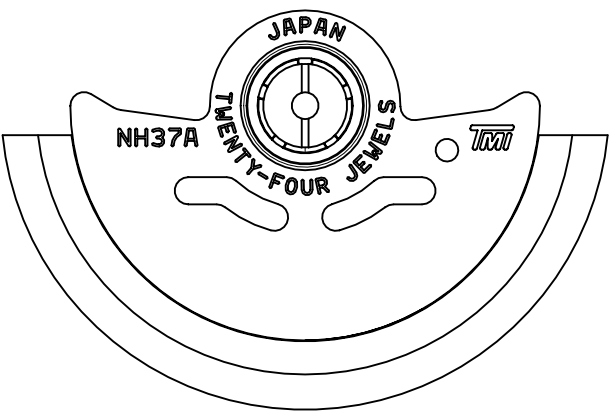

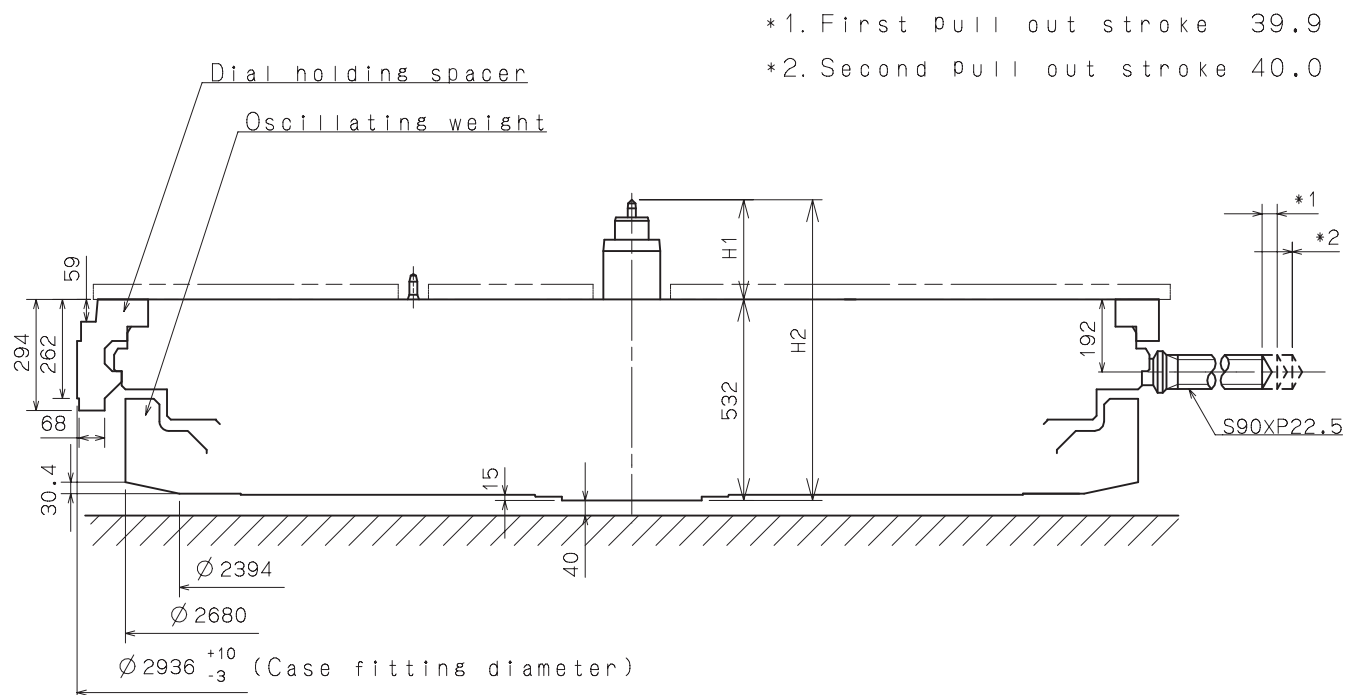


Center post	中心柱位	TYPE M 一般針高
Maximum height from main plate surface 與機芯平面的最大高度	H 1	266.7
Total height incl. movement 機芯總高度	H 2	798.7

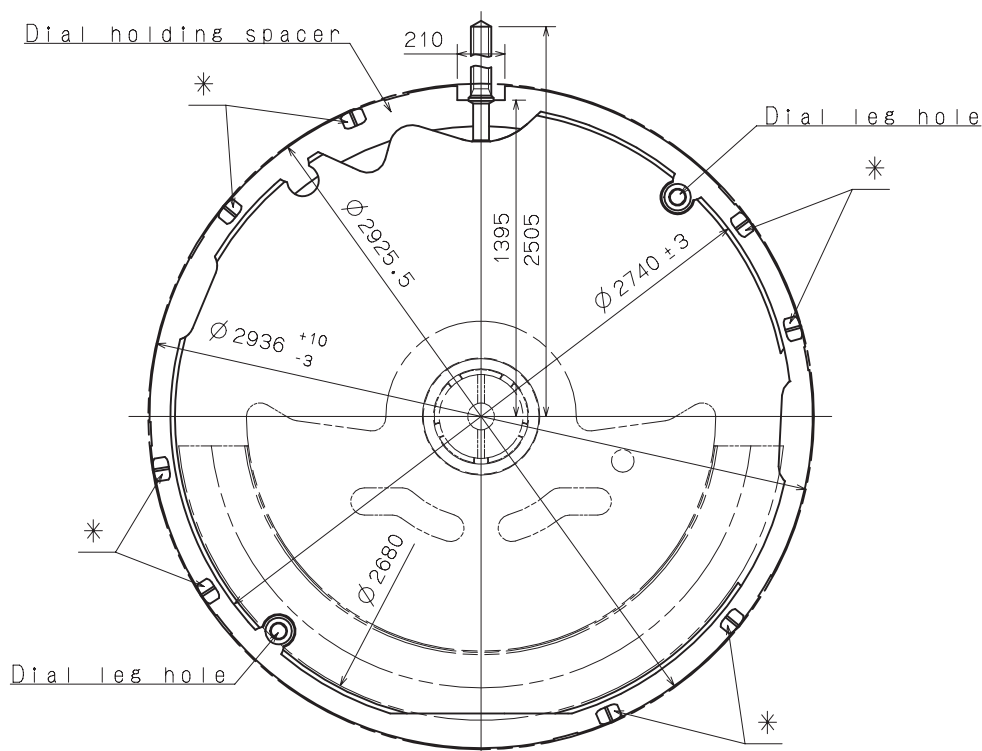


*Projection to fix movement to case.


Hour hand unbalance $\leq 1.50\mu\text{N}\cdot\text{m}$ (150mg·mm)
 Minute hand unbalance $\leq 1.25\mu\text{N}\cdot\text{m}$ (125mg·mm)
 Second hand unbalance $\leq 0.60\mu\text{N}\cdot\text{m}$ (60mg·mm)
 24 hour hand unbalance $\leq 0.05\mu\text{N}\cdot\text{m}$ (5mg·mm)

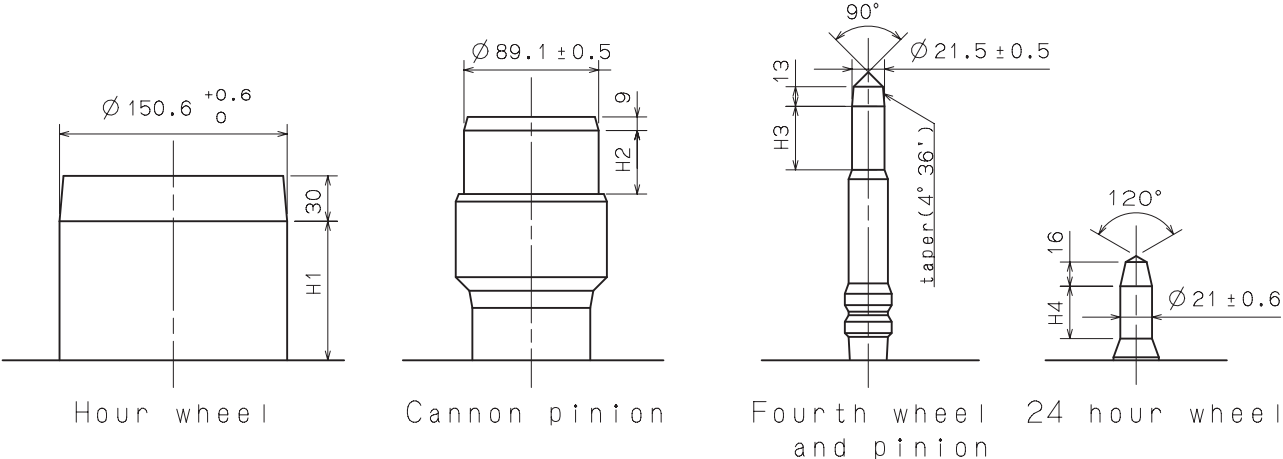


	Part No.				Dimension			
	Hour wheel 時針輪	Cannon pinion 分針輪(十反)	Fourth wheel and pinion 秒針輪	24hour wheel 24小時針輪	H1	H2	H3	H4
TYPE M 一般針高	0273 184	0225 426	0144 185	0157 182	128	61	42	34.6


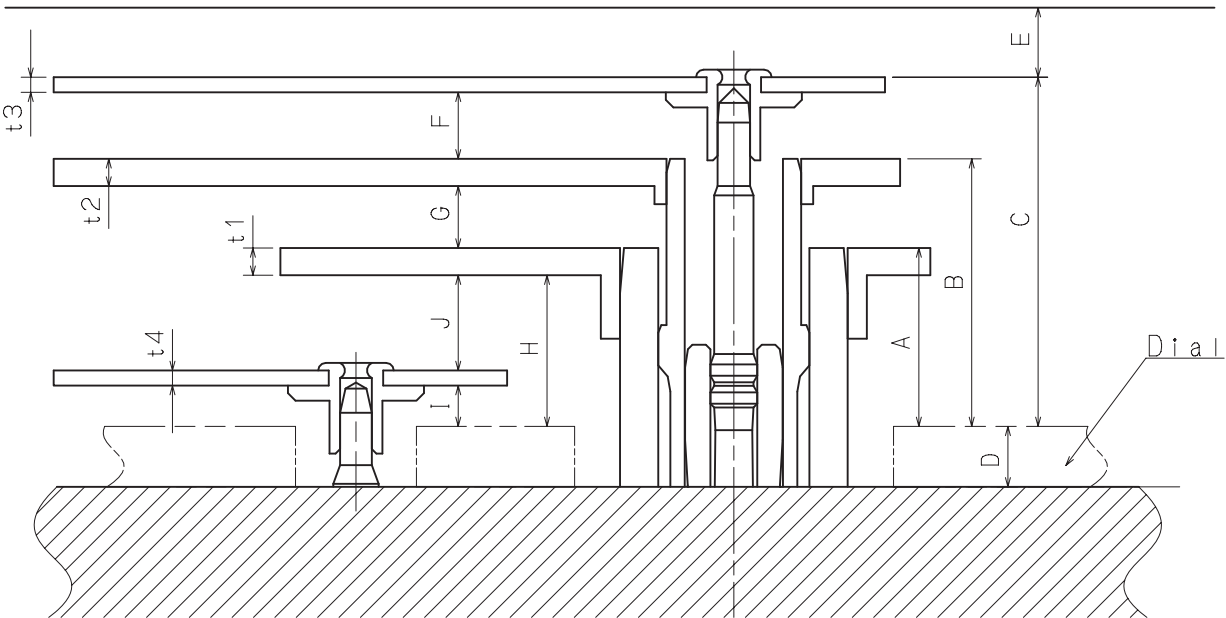


	A	B	C	D	E	F	G	H	I	J	t1	t2	t3	t4
TYPE M 一般針高	118	177	231	40	45	44	41	100	27	63	18	18	10	10

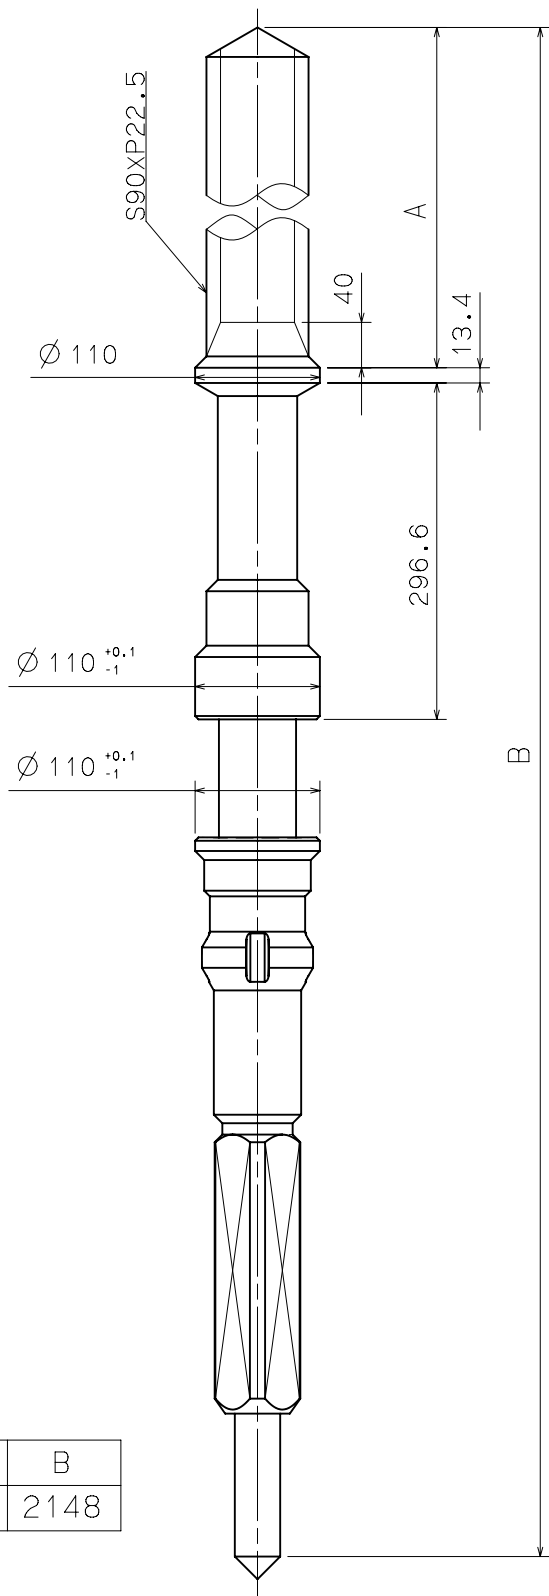

Part No.	A	B
0351 200	1100	2148

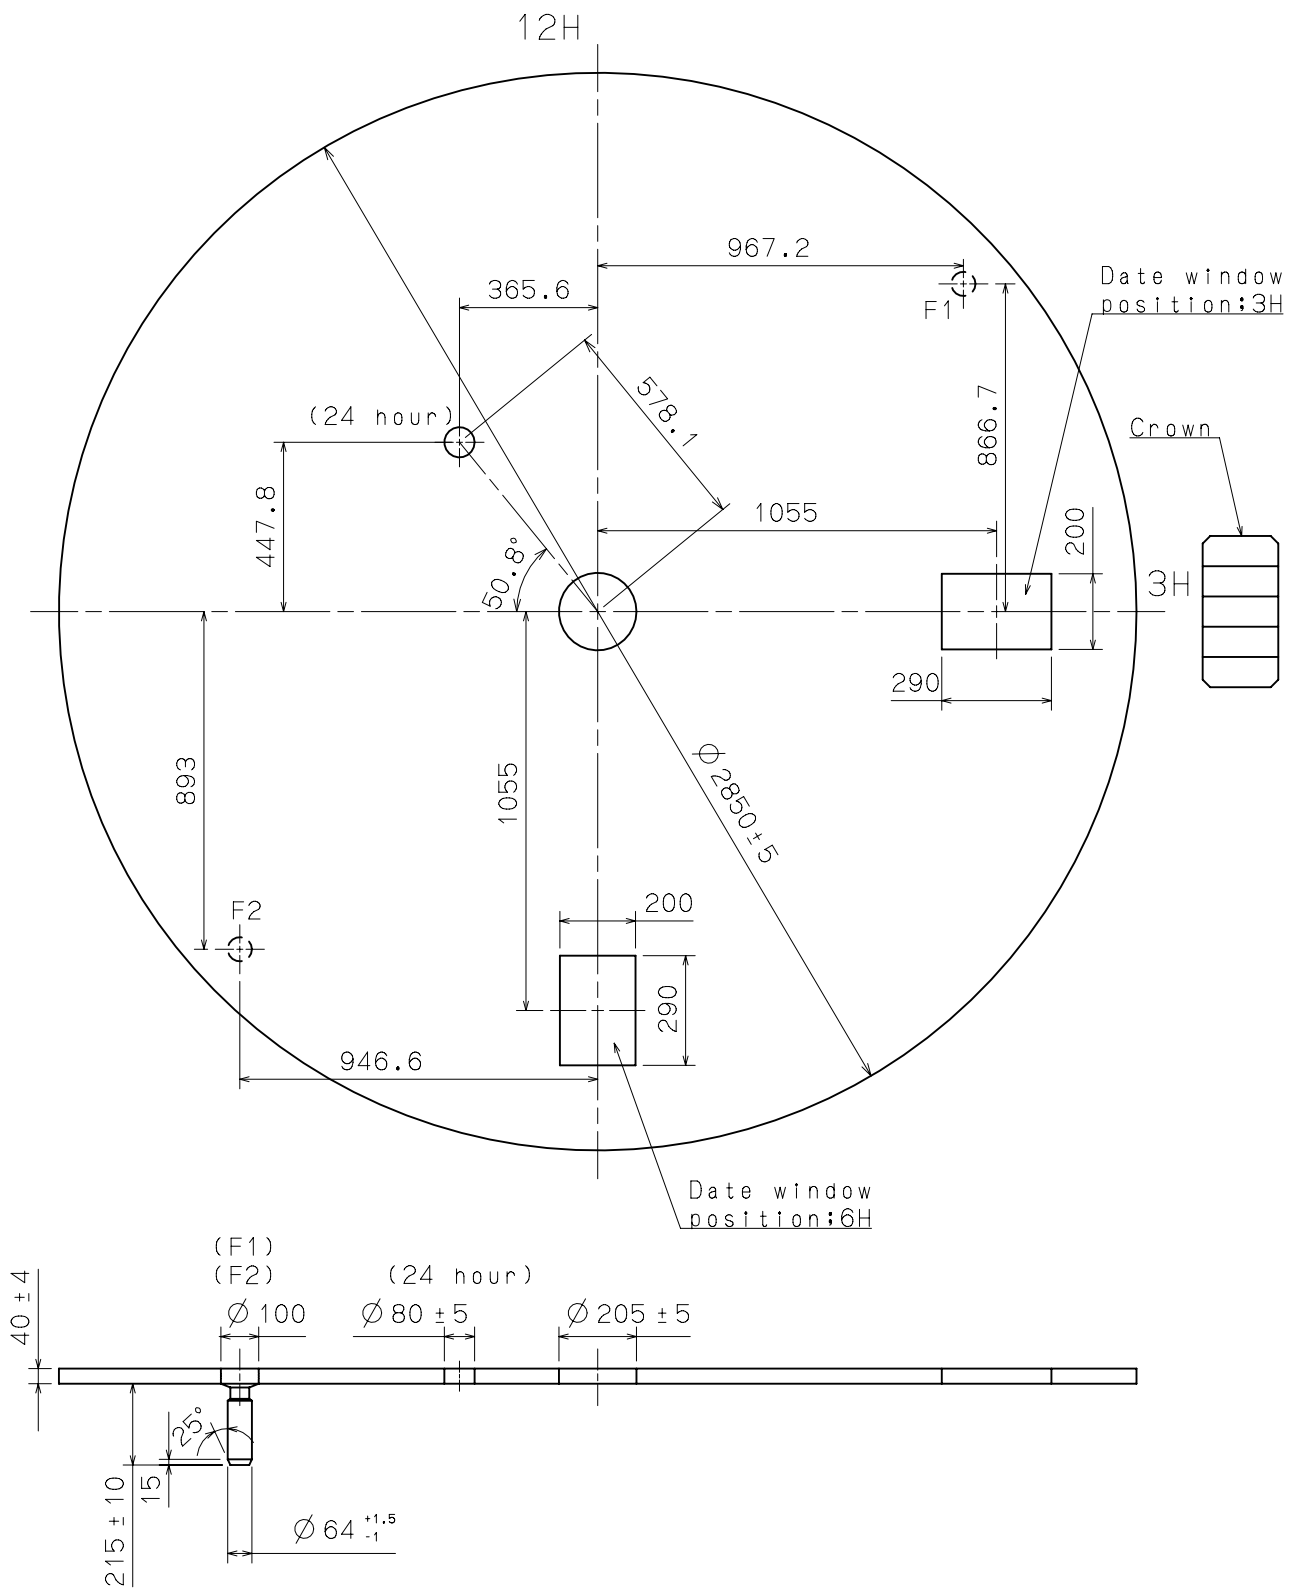

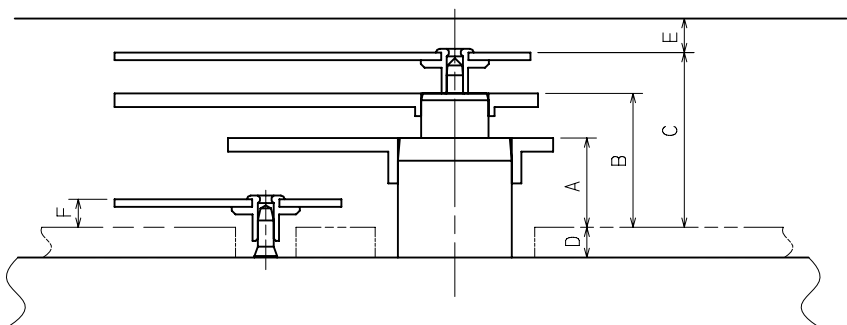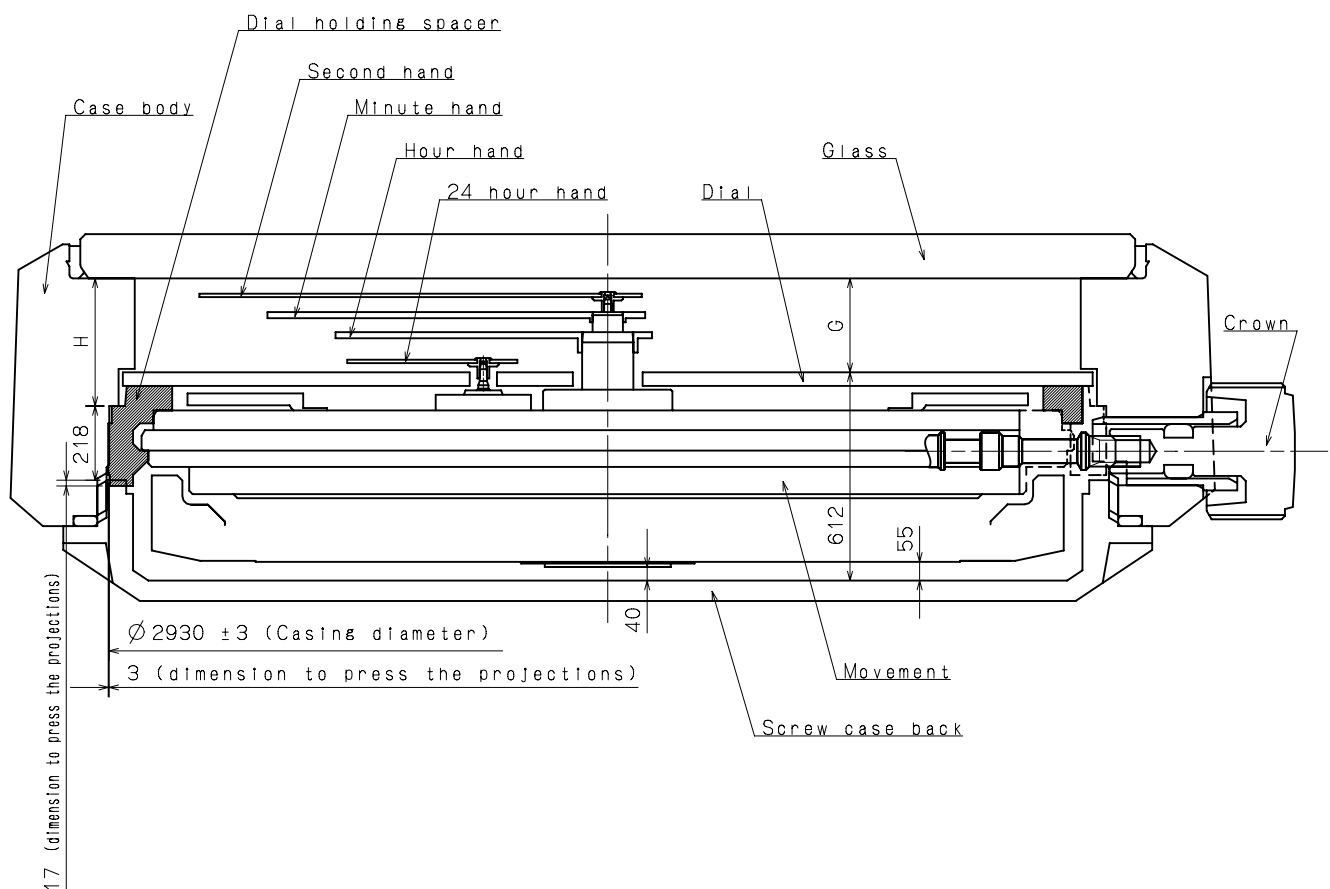

	A	B	C	D	E	F	G	H
TYPE M	118	177	231	40	45	37	276	375

